


# Anritsu

VM Series Automatic Combination Weigher

## Clean Multi Scale

**Cube**

KE7806A

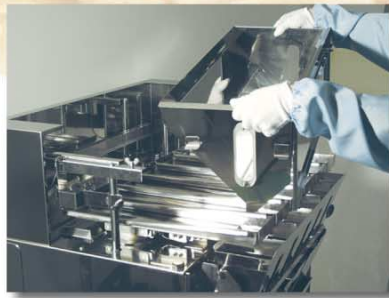

**For Dry Food**

**Compact Body**

**Greatly Reduced  
Cleaning Downtime**



# Cleaning Time Greatly Shortened to Improve Production Line Efficiency for Multi-products!

## 1. Simplified structure greatly saves cleaning time

- Greatly shortened maintenance downtime through integrated hopper design that reduces time for disassembly and reassembly times
- Flat surfaces with fewer projections (all SUS finish)
- Reduced number of parts with linkless and springless hoppers

## 2. Full cover design preventing ingress of foreign materials, insects, etc.

- No ingress of foreign materials due to fully enclosed design (Cover is an option)

## 3. Space saving compact body

- Ultra compact size saves space on production line

## 4. Suitable for production lines handling small to medium size products

- Supports products up to 1200 ml (800 ml/hopper)
- High-precision hopper structure permits handling of granular products

## 5. Anritsu's unique high-speed, high-accuracy, high-reliability VM weighing method


- Improved combination accuracy through VM weighing method using integrated weigh and memory hoppers
- High performance of 70 packs/minute with 6 heads using Anritsu's unique digital processing

## Specifications

| Model                         | KE7806A  |
|-------------------------------|--|
| Weighing range *1             | 5 to 500 g   |
| Accuracy( $\bar{X}$ ) *1      | 0.3 to 1.0 g   |
| Minimum graduation            | 0.1 / 0.2 / 0.5 g  |
| Max. speed *1                 | 70 packs/min   |
| Max. weight capacity *1       | 1200 ml  |
| Volume for weighing hopper *1 | 800 ml   |
| Display                       | 10.4 inch color TFT LCD                                    |
| Operation method              | Touch panel  |
| Preset memory                 | 100 products (maximum)                                     |
| Number of weighcells          | 6  |
| Combination method            | Vertical memory method                                     |
| Discharge method              | Single discharge   |
| Power requirements            | 200 to 240 Vac +10% -15%<br>single phase, 50/60 Hz, 800 VA |
| Mass                          | 300 kg   |
| Environmental conditions      | 0° to 40°C   |
| Protection class              | IP50 compliance  |
| External finish               | Stainless steel (SUS304)                                   |

\*1 Depends on product shape, product density, target weight, etc.

## External Dimensions

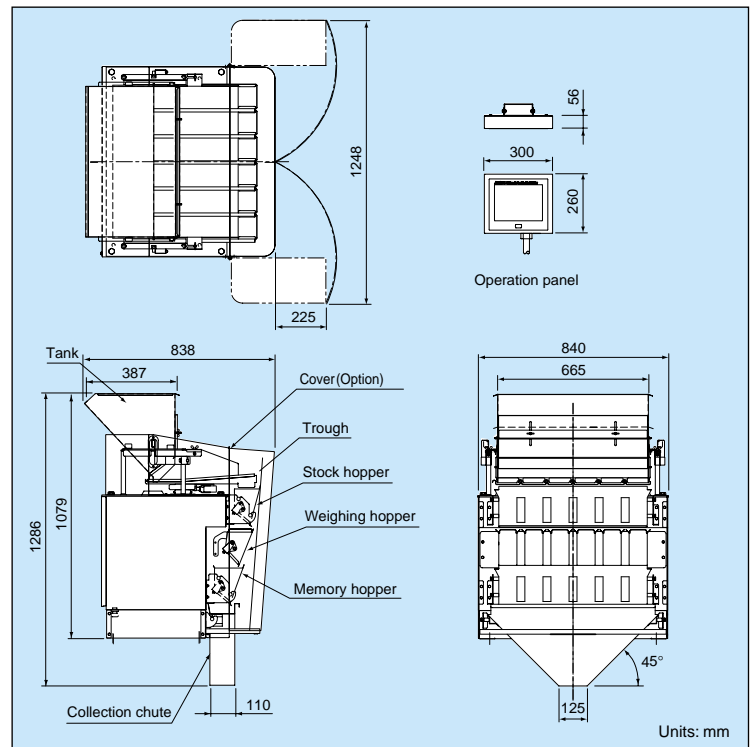

# Anritsu

ANRITSU INDUSTRIAL SOLUTIONS CO., LTD.

INTERNATIONAL SALES DEPARTMENT  
1800, Onna, Atsugi-shi, Kanagawa-Prf., 243-0032, JAPAN  
PHONE +81 46 296 6699  
FAX +81 46 225 8387  
E-Mail: KPOST@anritsu.co.jp  
http://www.anritsu.co.jp/E/Industry/

CAT. NO. K3104-A-1

ISO14001 CERTIFICATE No.JQA-EM0210  
ISO 9001 CERTIFICATE No.JQA-0566  
©ANRITSU INDUSTRIAL SOLUTIONS CO., LTD. 2003

- In addition to daily inspection, an annual maintenance check should be carried out.

Specifications are subject to change without notice. No part of the whole of this catalog may be reproduced without our permission.

**r100** Printed on 100%  
Recycled Paper

**PRINTED WITH SOY INK** Printed with environment-friendly  
vegetable soybean oil ink.

2003-10 50 (ddc) Printed in Japan